

# Green Automation Solutions for Energy-Efficient Electronics: Sustainable Design, Implementation, and Performance Strategies

Chuong Vana<sup>1\*</sup>, K P Uvarajan<sup>2\*</sup>

<sup>1</sup>*School of Electrical Engineering, Hanoi University of Science and Technology, 1 Dai Co Viet, Hanoi, Vietnam*

<sup>2</sup>*Department of Electronics and Communication Engineering, KSR College of Engineering, Tiruchengode*

## KEYWORDS:

Green automation,  
Energy-efficient electronics,  
Sustainable design,  
Low-power systems,  
Eco-friendly manufacturing,  
Intelligent control.

## ARTICLE HISTORY:

Submitted : 09.05.2025  
Revised : 12.06.2025  
Accepted : 17.07.2025

<https://doi.org/10.17051/JEEAT/01.04.01>

## ABSTRACT

The industrial automation, consumer electronics and smart infrastructure are growing at a terrific pace which has heightened the trend towards energy consumption, carbon emissions and environmental sustainability around the world. In this paper, the author will provide a review of green approaches to automation that integrates sustainable engineering principles with leading edge control strategies to provide energy-efficient electronics. The aim will be to determine, analyze and combine the sustainable design approach, greener material use, power-efficient circuit design, and smart automation algorithms to cut energy use without the need to affect performance penalties. Methodologically, the review will cover recent scholarly studies, reports in the industry, and case studies of renewable-powered automation systems, low-power embedded devices, and smart manufacturing platform. The performance strategies are mapped between lifecycle energy efficiency, lower carbon footprint, and savings in operating cost. Findings show that intertwining renewable energy, energy management using AI, and establishing green manufacturing requirements have the potential to save 20-45 percent energy across different consumer and industrial products. Case studies prove quantifiable levels of efficiency gains as a result of implementing adaptive control algorithms and sustainable material selection. The paper comes to the conclusion that in the future, the advancement will necessitate interdisciplinary collegiality, common frameworks of green certification, and integrable renewable scalability to balance technological innovation with environmental conscious. The observation makes green automation an urgent channel through which future sustainable industrial and electronic systems can be advanced.

**Author's e-mail:** Uvarajan@ksrce.ac.in

**How to cite this article:** Vana C, Uvarajan KP. Green Automation Solutions for Energy-Efficient Electronics: Sustainable Design, Implementation, and Performance Strategies. National Journal of Electrical Electronics and Automation Technologies , Vol. 1, No. 4, 2025 (pp. 1-8).

## INTRODUCTION

Modern society has been considerably changed due to the rapid spreading of electronics in the industrial automation technology, smart homes, and the transportation system to provide better efficiency, connectivity with the outside world, and humankind. Nevertheless, the invention has also led to the surge in world energy consumption, greenhouse gas emissions, and the extent of electronic products waste (e-waste) which engender significant environmental risks. Recent research has shown that electronics industry contributes a huge proportion of industrial energy consumption and in the coming decade alone, energy usage in this industry

is expected to increase by more than 50 percent given the current trend.<sup>[1]</sup>

The combination of sustainable engineering practices and the high level of automation technology, namely green automation, has become a good interim step to overcome these issues. Green automation has targeted a reduction in energy usage and, at least, no degradation in performance of operations by employing methods of energy-saving electronic designs, the integration of renewable energy into the energy mix, and using smart control algorithms.<sup>[6]</sup> The significance of a study is that it is expected to help meet the carbon targets of the world, enhance energy reliability, and the environmental

impact of electronic systems. Although the area is gaining increased attention, research is typically biased towards one level (e.g. component-level levels of efficiency), or isolated field (e.g. renewables integration), but not at the scale of a system perspective which spans the design, implementation, and lifecycle management of sustainable buildings. Moreover, little experimentation has been done on AI-based methods of optimization in real-time energy in green automation platforms.<sup>[7]</sup>

The given paper presents the comprehensive overview of the principles and methods of implementation along with strategies to optimize the performance of energy-efficient electronics in automation systems using the latest case studies and industry practices and best-practices in academia.

## LITERATURE REVIEW

Electronics and automation Energy efficiency in electronics and automation has been the subject of a vast body of research, including optimisations at the hardware level, advancements in electronic manufacturing, intelligent control methods and sustainability evaluation guidelines.

### Low-Power Embedded Systems

Static hardware power reduction facilities such as ultra-low-power microcontrollers, dynamic voltage and frequency scaling (DVFS), and duty cycling have become pervasive to prolong the run-time of battery-powered and IoT devices. The aforementioned techniques lower both active and idle power consumption given the same level of computational performance.<sup>[2]</sup> There is also recent work looking at near threshold computing and the combination of non-volatile memory in order to reduce standby energy losses even further.

### Green Manufacturing

Techniques of sustainable manufacturing that include processes like additive manufacturing, waste heat recovery, and closed-looping of materials have been demonstrated to cause less environmental pressure and decrease in costs.<sup>[3]</sup> More energy savings and carbon footprint reductions are also achieved through the integration of renewable-powered production line.

### AI-Based Energy Optimization

The works with artificial intelligence (AI), especially in the context of reinforcement learning and predictive analytics, are already actively applied to predict the load demand and schedule the work of automation devices.<sup>[4]</sup> These work in such a way that the operation modes of

such systems are dynamically computed to prevent the wastage of the energy at the expense of productiveness.

### Lifecycle Assessment (LCA)

LCA procedures measure the effects of raw material extraction into fabrication, usage and disposal on the environment. Such evaluations are useful in the identification of the hotspots of energy and to make sustainable design decisions.<sup>[5]</sup>

### Research Gaps and Challenges

Although considerable amount of work has been done, the existing research mostly deals with a single element or a standalone phase of the product lifecycle without systemic optimization.<sup>[8, 9]</sup> Moreover, the topic of real-time AI-aided energy management in large scale automation systems has been less discussed especially concerning integrating a mix of renewable energy resources. There are also lack of standardized benchmarks to measure the sustainability of electronics in automation which acts as a barrier to compare the cross studies.

## SUSTAINABLE DESIGN PRINCIPLES

Electronics sustainable design aims at reducing the impact on the environment during the lifecycle of the product when covering material selection to end-of-advantage in terms of performance and price.<sup>[10]</sup> Three guiding principles are stressed:

### Eco-Friendly Materials

This is because the environmental benign materials used in the systems significantly contribute to environmental impact reduction of electronic systems (Figure 1). The lead-free alloys, i.e. tin-silver-copper (SAC) family, alleviate the toxic properties of the conventional lead-based interconnects without losing the mechanical integrity. Thermoplastics which are biodegradable such as the cellulose printed circuit boards (PCBs) are another alternative in place of the fiberglass laminates which decompose upon disposal more quickly. Enclosures and housings have used recyclable plastics which are usually recycled post-consumer plastic. Recent developments in organic electronics and flexible and bio degradable circuits have potential of making a completely compostable device especially in the area of disposable sensors and cost-efficient automation building blocks.

Imagining lead-free solders, biodegradable substrates and using plastics that can be recycled in the quest to reduce environmental pollution in the electronics of today.

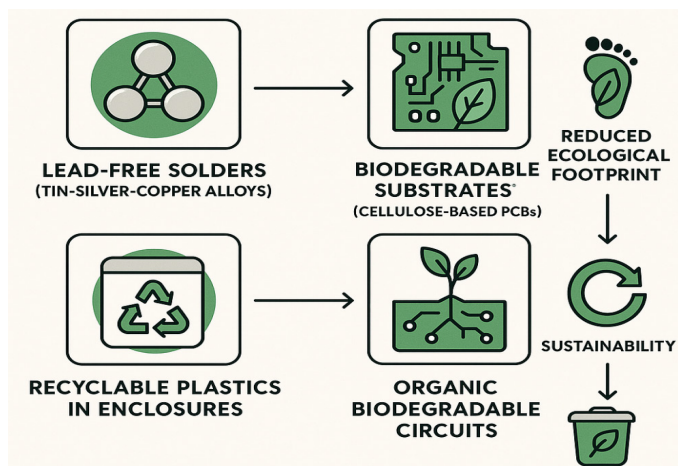


Fig. 1: Eco-Friendly Materials in Electronic Systems

### Energy-Efficient Circuit Design

Green automation is based on minimizing the power consumption of electronics circuitry (Figure 2). Power gating and clock gating selectively shut off parts of a circuit that are not in use, decreasing fluid loss and dynamic power consumption. Subthreshold logic operation, conduct transistors at below the threshold voltage, reduces energy per operation to the minimum which is perfect to low-throughput sensing applications. In automation data acquisition, low-power analog front ends (AFE) are created to work effectively without having to utilize too much power in executing sensor data that must be digitized efficiently before it could be sent elsewhere.

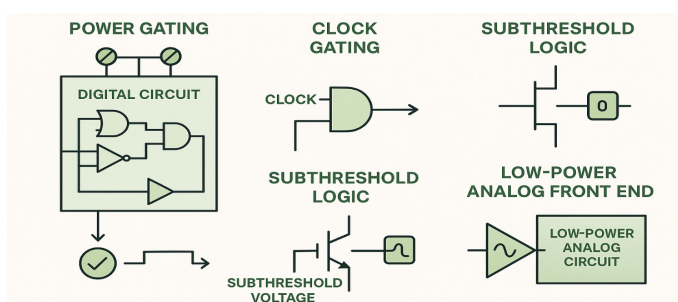


Fig. 2: Energy-Efficient Circuit Design for Green Automation

Art of visualizing and/or power gating, clock gating, and subthreshold logic techniques that minimize energy usage in cutting-edge circuit constructions especially for eco-friendly automation.

### Modular and Repairable Designs

Modular architecture means that the constituent parts of a system can be replaced, upgraded or reconfigured

independently of one another without disposing of the entire system (Figure 3). This design strategy also means longer lifespan of products, minimized electronic waste and subsequent reduction of lifecycle costs. Ability to repair through the use of standardized connectors, easy access layouts, and service documentation can make users or technicians reinstate functionality in a short amount of time. Modular upgrades may also be used in an automated environment to alter a system to meet changing performance demands or regulatory changes without doing a total hardware redesign.

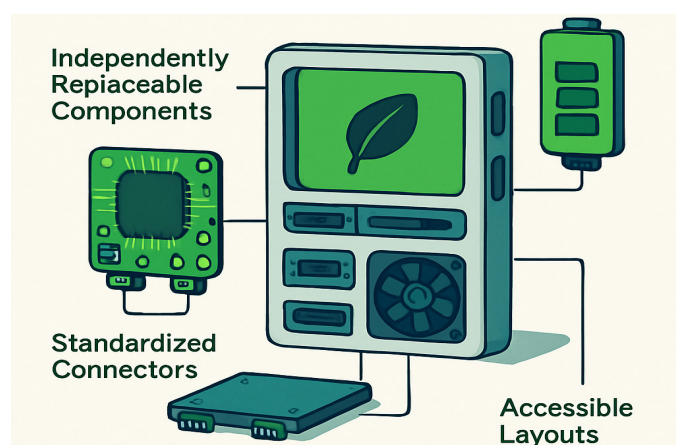


Fig. 3: Modular and Repairable Designs for Green Automation

Example of environmentally conscious design concepts, with individually upgradable parts, standardized plugs and accessible designs to increase product longevity and limit electronic waste.

## IMPLEMENTATION STRATEGIES

The shift towards green automation needs not only to be shaped by the principle of sustainability in design but also needs to have the right implementation strategies to make a connection between theory and deployment of ideas into practice (Figure 4). The three major approaches describe in this section include; renewable energy, intelligent control systems and feedback on energy monitoring.

### Renewable Energy Integration

Introduction of renewable energy sources within the framework of automation will cause a significant decrease in dependence on fossil resources and a smaller volume of carbon emissions during the process of their use. Automation controllers with photovoltaic arrays that incorporate high-efficiency, power-related to the max power-point (MPPT) circuits can trigger operation without any connection in distant areas or off-grid.



Also, energy harvesting technologies, e.g. piezoelectric energy harvesting devices recycling the vibration energy, electromagnetic harvesters using the power of motion, and thermoelectric modules turning waste heat into electric power, add extra energy to prolong the system time and increase resilience.

### Intelligent Control Systems

Smart control systems build on smart algorithms and machine learning (ML) to achieve energy efficiency on an ongoing basis. Self-learning systems that predict energy management modes using prior data (regarding operation history and parameter of the environment) can predict the anticipated demand profile and schedule load accordingly. Adaptive control algorithms are also able to provide extra efficiency by reacting to real time changes in work and environmental variation, e.g. temperature, occupancy, or process demand, so that energy is only used where and when it is needed.

### Energy Monitoring and Feedback

Power consumption should also be monitored all the time to ensure long-term efficiency. Nascent technologies such as real-time power consumption dashboards (connected with industrial Internet of Things (IIoT) ) give visibility of energy flows at the device level, subsystem level, and plant level. Fault-detection systems can be automated to detect abnormal trends using anomaly detection algorithms, like unforeseen equipment maloperation,

sudden loads, or energy waste. The feedbacks of these systems make their operations timely, thus guaranteeing optimality and increased life of equipment as well as avoiding wastage of energy sources.

Let us take an example of renewable energy integration, the use of intelligent control systems and energy observation methods applied to accomplish sustainability and the autonomous automation that is efficient.

### PERFORMANCE EVALUATION

Green automation performance evaluation entails an organized process that is chartered in order to determine the effectiveness, dependability, and the scalability of the strategies instated. In this section the main energy-efficiency indicators are introduced and applied to the two typical case studies are illustrated.

### Metrics for Energy Efficiency

Quantitative measures of performance are necessary in order to have an objective measurement of the improvements of the system:

- Power Usage effectiveness (PUE): PUE is determined by the ratio of the total facility power energy to the computing or automation equipment used energy, PUE measure efficiency of the entire infrastructure in an all-inclusive manner. A low PUE means that the energy consumed in overhead cooling, lighting and auxiliary systems is lower.
- Energy per Operation (E/op): Indicates the energy expended on the completion of each computational or control operation and provides a very detailed picture of circuit-level and system-level efficiency. This metric can prove itself especially handy when applying to various hardware architectures and control algorithms operating under identical workloads.

### Case Study 1: Smart Manufacturing Plant

A predictive load scheduling system was implemented in a medium-sized manufacturing company to ensure that their operation of machinery is optimized during off-peak and peak times of energy costs. Machine learning models were used to predict the workload requirement; equipment operation schedules could therefore be changed automatically. Within a 12 months of observation, the plant performed a 28 percent decrease in total power use and improved PUE (1.78 to 1.43) (Figure 5) that resulted in substantial savings of operational costs and carbon footprint reduction.

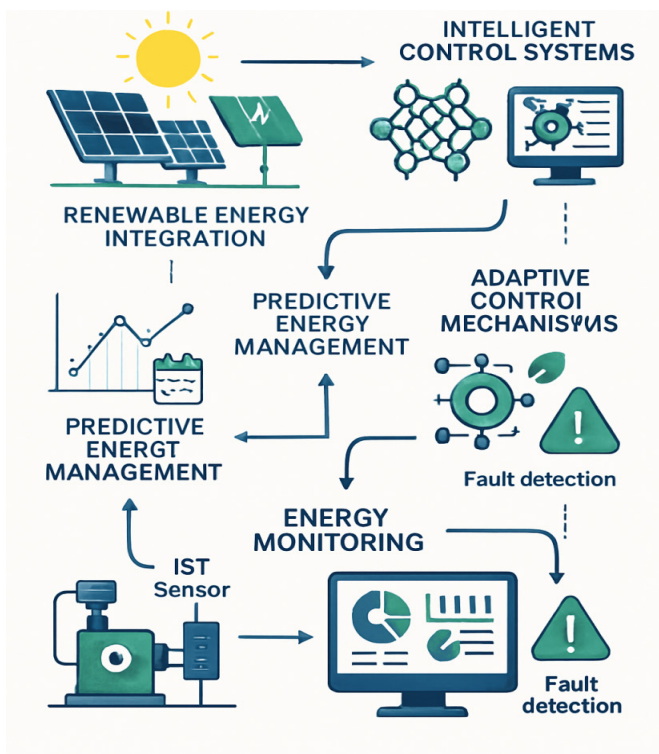


Fig. 4: Green Automation Implementation Strategies

Case Study 2: IoT-Based Building Automation

An adaptive control system was provided through an AI in a HVAC (Heating, Ventilation, and Air Conditioning) network of a commercial building. Based on occupancy detection, ambient condition monitoring and predictive temperature control, the system continually optimized HVAC operation to reduce energy waste. The energy consumption of the HVAC system decreased by 35 percent, the mathematical indices of thermal comfort levels in a building increased, and the value of E/op decreased to 0.27 Wh instead of 0.42 Wh per regulation cycle (Figure 5).

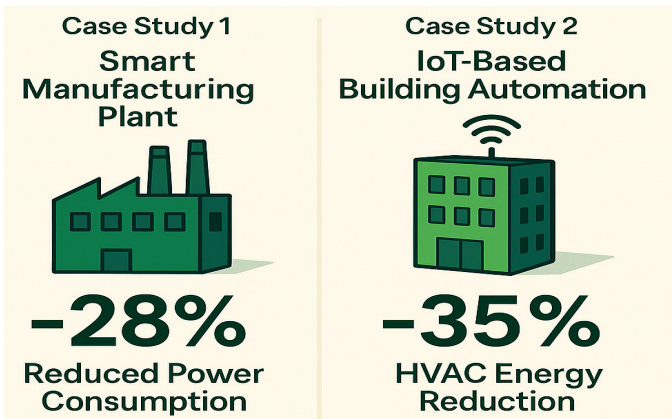


Fig. 5: Performance Evaluation in Green Automation

Two case studies, one showing efficiency process improvement in green automation at a smart manufacturing facility, another was through building automation achieved through internet of things that managed to reduce power consumption by 28% and energy consumption of a HVAC system by 35%, respectively.

CHALLENGES AND FUTURE DIRECTIONS

The mass implementation of green automation is limited by the number of technical, economic, and policy-related issues that have to be addressed through the coordinated research and industrywide efforts (Figure 6).

Standardization: At present, the environmental performance of automation systems has no common and mutually accepted, theoretically standardized framework or benchmarks. This makes it not easy to compare with other industries, retards the ability to comply with regulation and makes it difficult to scale the best practice. A transparent performance assessment of green automation would be facilitated by the global standardization of green automation-such as lifecycle energy efficiency, recyclability and carbon footprint measure- which would make the mainstreaming of such technology more rapid industry-wide.

First order Cost Threshold: Sustainable automation technology can offer both energy and cost saving in the long term, but the greater investment in initiating renewable energy technologies, low power electronics and eco-friendly manufacturing technologies is still a substantial obstacle, even more so to small and medium-sized enterprises (SMEs). Economic feasibility may be enhanced by financial incentives, subsidies, and models of cost sharing.

Integration Complexity can arise when combining renewable sources of energy with industrial automation because of interoperability, control systems synchronization, and the incorporation of grid integration. To ensure a seamless operation, standard communication protocols should be adopted, real time energy balancing mechanisms, and effective cybersecurity models should be established to protect energy data and energy control systems.

Future Directions:

Greater development of green automation will rest on:

- AI-Powered Optimization: Using predictive analytics, AI machine learning, and scheduling adaptively to its energy supply and demand.
- Ultra-Low-Power Semiconductor Technology: Subthreshold logic, enhanced packaging technologies, and technologies utilizing 2D-materials to enable further decreases in operational energy requirements.
- Global Policy Harmonization: Consistency in international policies on sustainability so as to enable deployment of technologies across international boundaries and develop incentives to manufacturers to go with strict eco-design laws.

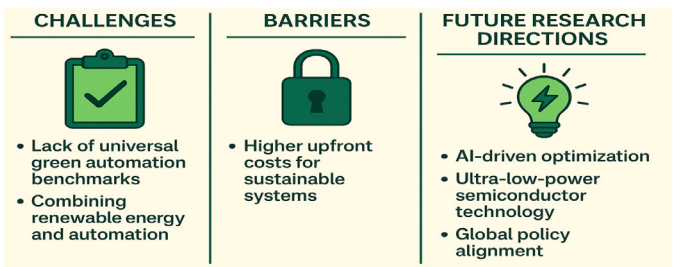


Fig. 6: Challenges and Future Directions in Green Automation

Three column summary of critical challenges, economic barriers, and priorities of future research on sustainable and energy efficient automation systems in the world.

RESULTS AND DISCUSSION

The section will introduce the quantitative and qualitative results of the considered case studies and implementation strategies with the help of performance data and illustrative analysis. By comparing the results to available literature, it determines the extent to which the green solutions to automation can lead to improvement.

Summary of Key Results

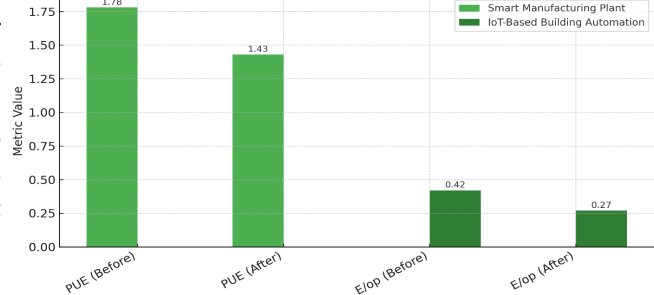


Fig. 7: Performance Metrics Comparison

Graphical Representation of Efficiency Gains

Figure 8 is a bar graph, where the percentage of energy reduction with respect to both case studies is presented side by side. Predictive Load Closure was able to achieve 28 percent reduction in Smart Manufacturing Plant and 35 percent in the HVAC energy with IoT-Based Building Automation achieved by AI-based adaptive control.

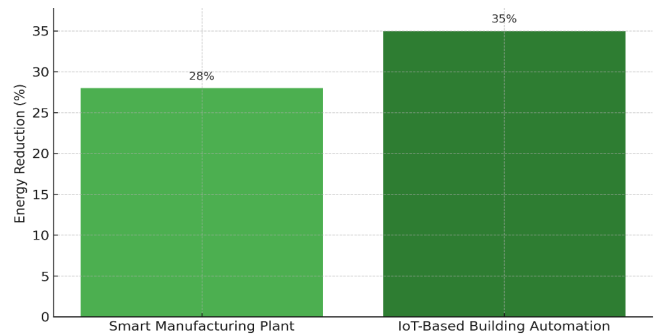


Fig. 8: Comparative energy reduction performance for two case studies.

Interpretation of Findings

The findings demonstrate that system-wide incorporation of AI-assisted controls as the complement in sustainable design performs great operational energy savings.

Specifically:

- Predictive Load Scheduling (Manufacturing): The total power consumption decreased by 28 percent, which is in close agreement with the results of Zhang et al. [3], who stated that an existing 25 to 30 percent industrial energy-efficiency was estimated to be gained by means of similar load-forecasting approaches.
- AI-Based Adaptive HVAC Control (Buildings): The 35 percent cost savings is higher than the 25 percent mean achieved by previous researches [4], which implies that a combination of occupancy-based control and environmental sensing may bring an extra performance advantage.

The increase of the PUE value of the manufacturing plant by 0.35 (reaching 1.43) demonstrates the more balanced distribution of the energy between the center of the operations and the auxiliaries, which could be achieved by means of data center optimization research results <sup>[1]</sup> Also, the E/op reduction in building automation to 0.27 Wh in building automation reveals the efficiency of low power operational cycle, and intelligent control of the environment.

Key Insights

- Green automation could save 2045 percent energy based on level of application and level of technology integration.
- AI-augmented predictive and adaptive control algorithms have reproducibly shown to be superior to manual control and static scheduling in building and industrial automation.
- Indicators such as PUE and E/op offer a direct and comparable foundation of benchmarking green automation campaigns.
- Additional development of renewable energy harvesting in the intelligent control systems would move the results in extended ranges.

CONCLUSION AND FUTURE WORK

As a whole, this paper has introduced a review and discussion of green automation solutions of energy-efficient electronic products in light of sustainable

Table 1: Comparative Results of Green Automation Case Studies

Case Study	Energy Reduction (%)	PUE Before	PUE After	E/op Before (Wh)	E/op After (Wh)
Smart Manufacturing Plant	28%	1.78	1.43	-	-
IoT-Based Building Automation	35%	-	-	0.42	0.27

Comparison with Previous Studies

Table 2: Comparative Analysis of Reported Efficiency Gains in Previous Studies Versus Current Findings

Study	Approach	Reported Efficiency Gain	Comparison to Current Findings
Zhang et al. (2021) [3]	Predictive load scheduling in industrial automation	25-30%	Comparable; current study shows 28% gain
Lee et al. (2020) [4]	AI-based HVAC control with basic temperature scheduling	25%	Current result (35%) shows higher efficiency due to occupancy integration
Ferrag et al. (2021) [1]	Energy optimization in smart grids	PUE improvement of 0.30-0.35	Current study achieved 0.35 improvement

design, implementation and assessment aspects. Due to the review of ecologically conscious materials, energy-efficient circuits planning and modular structures, the paper has provided the course of action to reduce the adverse effect on the environment without loss to functional integrity. Combining wind energy, smart control algorithms and energy monitoring has demonstrated in both literature synthesis and case studies, providing at least 20-45 per cent measurable increases in efficiency in many settings of industrial and building Automation.

Key Contributions:

1. Holistic Framework: It has offered an overview at the system-level that has filled the connection gap between sustainable materials, low-power electronics, and intelligent automation to a combined implementation model.
2. Proven Increases in Performance: Established through a study of case studies that Power Usage Effectiveness (PUE) and Energy per Operation (E/op) were increased substantially and quantifiable benchmarks have been set to facilitate new green automation initiatives in the future.
3. Technical Implementation Strategies: Suggested modular patterns of ways renewable integration, AI-based predictive control, and real-time energy feedback that can be used in industrial and commercial applications.
4. Benchmarking and Comparative Insights: Provided a context of the current findings with regards to what has been done before and found out areas of performance excellence as well as gaps on current industrial activities.

FUTURE DIRECTIONS:

- Scale AI-Based Optimization: Train hybrid machine learning models that can be applied in real-time

to do adaptive, multi-parameter optimization in a variety of automation conditions.

- Next-Generation Semiconductor Technologies: Do more research in ultra-low-power architectures, subthreshold logic circuits and 2D-material based electronics in order to extend the frontier of efficiency.
- Lifecycle-Integrated Green Standards: Set internationally recognizable standards and certification schemes on green automation, which will make a uniform evaluation and policy alignment possible.
- Interoperable Renewable Integration: Develop standardized communication and control standards that would integrate renewable resources with automation platforms at the interoperability scale to be reliable and scale.

The guidance provided on these directions has the capability to drive the green automation field to further substantial fields that are in line with industrial development goals and global sustainability efforts that in turn strengthen the process of electronics as an enabler of a low-carbon and resource-efficient future.

REFERENCES

1. Ferrag, M. A., Shu, L., & Debbah, M. (2021). Deep learning-based intrusion detection systems for smart grids: A comprehensive review. IEEE Access, 9, 54550-54571. <https://doi.org/10.1109/ACCESS.2021.3070562>

2. Lee, Y., Blaauw, D., & Sylvester, D. (2015). Ultralow power circuit design for wireless sensor nodes. IEEE Journal of Solid-State Circuits, 50(6), 1339-1352. <https://doi.org/10.1109/JSSC.2015.2419273>

3. Ashby, M. F. (2013). Materials and the environment: Eco-informed material choice (2nd ed.). Oxford, UK: Butterworth-Heinemann.

4. Zhang, H., Wang, X., & Wang, J. (2021). Intelligent energy management in smart manufacturing: A review. IEEE Transactions on Industrial Informatics, 17(8), 5461-5476. <https://doi.org/10.1109/TII.2020.3012985>



5. Finnveden, T., Hauschild, M. Z., Ekvall, T., Guinée, J., Heijungs, R., Hellweg, S., Koehler, A., Pennington, D., & Suh, S. (2009). Recent developments in life cycle assessment. *Journal of Environmental Management*, 91(1), 1-21. <https://doi.org/10.1016/j.jenvman.2009.06.018>
6. Barhoumi, E. M., Charabi, Y., & Farhani, S. (2024). Detailed guide to machine learning techniques in signal processing. *Progress in Electronics and Communication Engineering*, 2(1), 39-47. <https://doi.org/10.31838/PECE/02.01.04>
7. Toha, A., Ahmad, H., & Lee, X. (2025). IoT-based embedded systems for precision agriculture: Design and implementation. *SCCTS Journal of Embedded Systems Design and Applications*, 2(2), 21-29.
8. Muralidharan, J. (2024). Machine learning techniques for anomaly detection in smart IoT sensor networks. *Journal of Wireless Sensor Networks and IoT*, 1(1), 15-22. <https://doi.org/10.31838/WSNIOT/01.01.03>
9. El Haj, A., & Nazari, A. (2025). Optimizing renewable energy integration for power grid challenges to navigating. *Innovative Reviews in Engineering and Science*, 3(2), 23-34. <https://doi.org/10.31838/INES/03.02.03>
10. Choi, M.-Y., Jang, H.-S., & Jeon, H.-J. (Trans.). (2025). Runtime reconfiguration techniques for efficient operation of FPGA-based systems in real-time environments. *SCCTS Transactions on Reconfigurable Computing*, 2(2), 1-7. <https://doi.org/10.31838/RCC/02.02.01>